







## INSPIRING COLOR INSPIRING LIVING.





Since its founding over 40 years ago, Forever Corporation has grown to become one of the Premier manufacturer of paints and coatings. Paints Forever has been at the forefront of paint manufacturing across the region and is the premier decorative paints brand of the top growing decorative paints company. During this tenure Company has steadily expanded its strong technological background, professional staff, operational staff, product quality and customer base, to help you build relationships that encourage business success.

It is our constant Endeavour to offer the highest level of customer satisfaction through total quality management and constant product innovation. We are marching towards our goal in the global competitive environment by now taking a deeper interest into environmental and social concerns. In the long run of our operations, we have tackled every challenge that came our way and counted it successfully with our operational efficiency and management. Our passion to excel has given us a unique distinction in every facet of the paint industry.

Ultimately the motto of Paints Forever is to deliver the world's best paint which doesn't harm our environment and our fellow beings, at the best affordable price. Paints Forever's products are formulated and manufactured not only keeping the safety in mind of its end customers, but also for the safety of its employees.

Paints Forever top player in the category of Paint Manufacturers a well- known establishment acts as a onestop destination servicing customers. The services of manufacturing by Paints Forever are segregated in the series as "Heaven Series", "Smile Series", "Forever Series", "Grand Series".

Paints Forever offer a wide range of products including Interior-Exterior Emulsion Paints, Primers & Cement based Wall Putty, Water Proofing Compounds, Designer Metallic Paints and Solvent Based Product. All our products are distributed nationally to a diverse customer base reaching contractors and homeowners. Among all the customers we are proud to serve our independent paint retailers.

"We promise to always maintain our high standards to give you the absolute best."

# BRINGING COLOR TO LIFE



## HOW TO CHOOSING THE RIGHT COLOURS

Choosing the right color can depend on various factors, such as the purpose, context, and personal preference, ther are certain colur combinations that are more appealing. Use the colour wheel to select an inspiration colur scheme that will look great in your home.

VIOLET

PRIMARY COLOUR Red | Blue | Yellow

SECONDARY COLOUR

Violet | Green | Orange

#### TERTIARY COLOUR

Blue-Green | Blue-Violet | Red-Violet Red-Ornage | Yellow-Orange | Yellow-Green

















Paints FOREVER Colour Your Life Milt Danis For





Prove Bring based Bring based














The Shade in this Catalogue shown here are indicative only. Use Paint Forever Colour book for actual shades






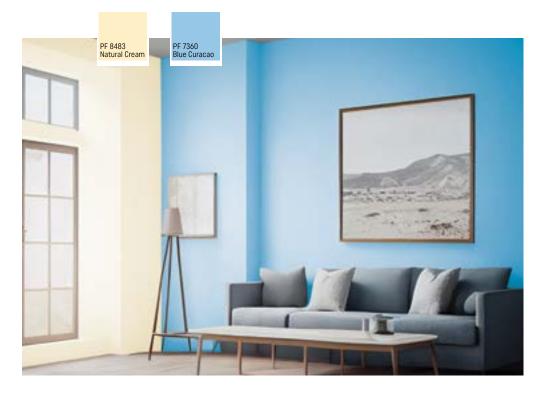

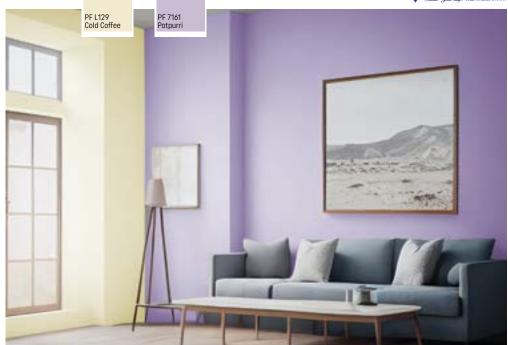

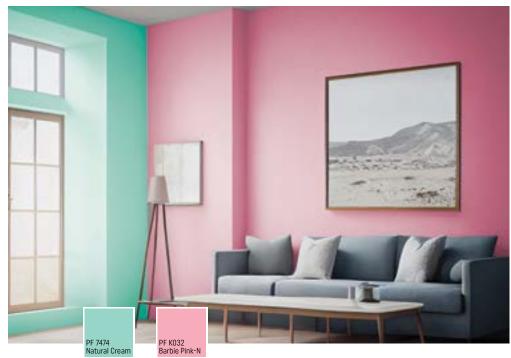

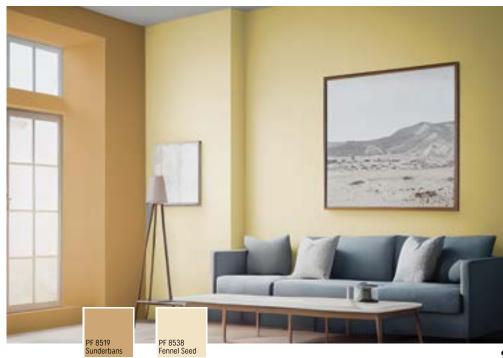



































## **LUXURY INTERIOR & EXTERIOR EMULSION**

#### **DUST PROOF SEMI GLOSS**



**DUST PROOF SEMI GLOSS** smoothness and uniform colour deposition. In other words, when you paint your walls with the Dust Proof you also get quality that is world class. Its dispersion is a state-of-the-art technology that combines quality raw materials in unique formulation that delivers sheen.

		Ð		
Ultra-low	Anti-Dirt	Long	Water	Best in Class
VOC	Pickup	Lasting	Repellency	Sheen

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.
Method of Application	Brush, Roller or Spray
Finish	Sheen
Drying time	60 minutes
Re-coating Interval	4-5 hours
Coverage	180-200 sq.ft. per Itr 1 coat 120-130 sq.ft. per Itr 2 coat
Dilution	35% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable

#### **IMPRESS DAMP LOCK PEARL GLOW**



**IMPRESS DAMP LOCK PEARL GLOW** is a luxury wall finish specially formulated to impart a rich sheen to decorate interior & exterior walls. It possesses excellent washability and stain resistance to keep the walls beautiful for long. Its anti-bacterial property provides proven protection against bacteria and it also contains ultra-low VOC ensuring safe and healthy interiors & exteriors



Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work,etc.
Method of Application	Brush, Roller or Spray'
Finish	High Sheen
Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	210-230 sq.ft. per Itr 1 coat 120-130 sq.ft. per Itr 2 coat
Dilution	30-40% by volume with clean,potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable

#### **IMPRESS RICH MATT**



**IMPRESS RICH MATT** is a specially formulated water-based modified acrylic emulsion paint for interior & exterior walls. It is durable, washable and provides a superior, smooth finish. It offers good hiding and spreading.

Low VOC	Smooth Finish	Anti Bao Proper		Long Lasting	Anti Chalking	Water Based Acrylic Emulsion
Area of Ap	plication				eiling & Pla < work,etc.	aster/
Method of Application		on	Brush, Roller or Spray'			
Finish			Matt			
Drying time			45 mins			
Re-coating Interval			5-6 hours			
Coverage					per Itr 1 coa per Itr 2 coa	
Dilution			40%	oy volume	e with clear	n,potable

Dilution	water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable



## **LUXURY INTERIOR & EXTERIOR EMULSION**

#### **EASY WASH**



**EASY WASH** is a high performance, washable emulsion with a unique latex film. This ensures that the walls stay new and beautiful, wipe after wipe, day after day. Easy Wash offers better coverage than standard emulsion: thus, at an equivalent cost per sq. ft, you get a more beautiful finish plus resistance against stains and fungus.

the main and the second		Ø			*	
Supreme Washability	Supreme Fungal Resistance	Supreme Finish	Non Fading Bright Colours	Dirt Guard	Ultra High Sheen	

Area of Application	Celing,False Ceiling & Plaster/ Concrete/Brick work,etc.
Method of Application	Brush, Roller or Spray'
Finish	High Sheen
Drying time	45 mins
Re-coating Interva	5-6 hours
Coverage	180-200 sq.ft. per ltr 1 coat 120-130 sq.ft. per ltr 2 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable

SAFEWALL SHINE



**SAFEWALL SHINE** Luxury Interior & Exterior Emulsion is an Acrylic based emulsion and is a 'Gold Standard' emulsion. It has a smooth sheen finish that ensures long lasting beautiful walls. It is highly durable and washable. It is anti peel, anti fungal and resists fading and offers good hiding.

				-	
High	Gold Standard	Smooth	Non Fading	Advance Fungal	Peel
Durability	Emulsion	Sheen Finish	Bright Colours	Protection	Guard

Area of Application	Celing,False Ceiling & Plaster/ Concrete/Brick work,etc.
Method of Application	Brush, Roller or Spray'
Finish	Sheen
Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	170-190 sq.ft. per Itr 1 coat 110-120 sq.ft. per Itr 2 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable

#### SAFEWALL LUXURY



**SAFEWALL LUXURY** is an Acrylic based emulsion and is a 'Gold Standard' emulsion. It has a smooth sheen finish that ensures long lasting beautiful walls. It is highly durable and washable. It is anti peel, anti fungal and resists fading and offers good hiding.

		$\langle \rangle$		-	
High	Gold Standard	Smooth	Non Fading	Advance Fungal	Peel
Durability	Emulsion	Sheen Finish	Bright Colours	Protection	Guard

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.
Method of Application	Brush, Roller or Spray'
Finish	Smooth Sheen
Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	170-180 sq.ft. per ltr 1 coat 110-120 sq.ft. per ltr 2 coat
Dilution	40-50% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable



## **SUPER PREMIUM INTERIOR & EXTERIOR EMULSION**

#### **FORCE PROJECT**



**FORCE PROJECT** specially formulated water based emulsion which ensures that the colour looks bright and clean. Its unique water resistant property keeps your walls protected and beautiful for long time. It is 100% acrylic paint providing algae and fungus protection. It protects the walls against formation of black spots. Special resins resist chalking and peeling and maintain the film-integrity

Rich Sheen Resist Cracking Formula and Peeling	Excellent Opacity Long Lasting & Coverage Film		
Area of Application	Celing,False Ceiling & Plaster/ Concrete/Brick work,etc.		
Method of Application	Brush, Roller or Spray'		
Finish	Sheen		
Drying time	45 mins		
Re-coating Interval	5-6 hours		
Coverage	180-190 sq.ft. per Itr 1 coat 110-120 sq.ft. per Itr 2 coat		
Dilution	40-50% by volume with clean, potable water		

20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr

White & All bases are also avaialable

Pack Sizes

Shade

MASTER SHINE

GRACE



**MASTER SHINE** Emulsion gives the best-in-class coverage, whiteness, smoothness & finish to the walls. Its enhanced bioresistant formula prevents the walls from fungal & algal attacks and the fine extenders helps in giving a butter-like smooth finish to the walls.

Long Lasting Pearl Like Finish	Low VOC	Best in Class Water Repellance	Smooth
Area of Applic	ation	·	Ceiling & Plaster/

	Concrete/Brick work, etc.
Method of Application	Brush, Roller or Spray'
Finish	Sheen
Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	170-190 sq.ft. per ltr 1 coat 120-130 sq.ft. per ltr 2 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable



**GRACE** is an Acrylic water based emulsion for walls. It gives a soft sheen finish to your walls. The paint's superior finish adds a touch of style to your rooms all at an affordable price.

Water Based Smooth Emulsion Paint	W VOC	Good Coverage	Anti Chalking Properties	Smooth Finish	
Area of Application	Area of Application Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.				
Method of Application	n E	Brush, Roller or Spray'			
Finish	S	Sheen			
Drying time	4	45 mins			
Re-coating Interval	5	-6 hours			
Coverage         190-200 sq.ft. per           110-120 sq.ft. per         110-120 sq.ft. per					
Dilution		30-40% by volume with clean,potable water			
Pack Sizes	2	0 Ltr, 10 L	tr, 4 Ltr, 1 Ltr		
Shade	V	Vhite & All	bases are als	o avaialable	



## **SUPER PREMIUM INTERIOR & EXTERIOR EMULSION**

. . . . . .

#### **SPACE FLAT SHYNE**

# Concernation

**SPACE FLAT SHYNE EMULSION** is a superior quality 100% acrylic emulsion based with germ killing formula. It is based on Silver Ion Technology that kills 99% of bacteria on the painted surface and gives safe & healthy environment at home.

			(\$\$		
Water Based Acrylic Emulsion	Low VOC	Good Coverage	Anti Bacterial Properties	Fungal Resist	Sun Reflect Technology
Area of Applic	cation		g, False Ceilir ete/Brick wo		ster/
Method of Ap	Brush	, Roller or Sp	oray'		
Finish	Mid SI	heen			
Drving time 45 mine					

Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	190-200 sq.ft. per ltr 1 coat 110-120 sq.ft. per ltr 2 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable



WALL MASTER



**ROCK DAMP PROOF LAMINATED SEALER** Cum Emulsion provides a rich matt finish with excellent washability and stain resistance property that enhances the visual appeal at an affordable price. It helps keep the walls fresh and new for many years. It is a well-balanced product with good soft sheen matt, anti-fungal & anti-fading properties and has good elongation which takes care of hairline cracks.

Excellent Washability Smooth Repellency No Odour Excellent Stain Reflect No Odour Resistance Sun Reflect

Opling Tales Opling & Dipeter/

Area of Application	Celing,False Ceiling & Plaster/ Concrete/Brick work,etc.
Method of Application	Brush, Roller or Spray'
Finish	Matt
Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	190-200 sq.ft. per Itr 1 coat 120-130 sq.ft. per Itr 2 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable



**WALL MASTER EMULSION** is formulated with specially modified silicon acrylic binder to give excellent whiteness and spatter resistance. Excellent hiding and smooth finish of this white ceiling paint helps to hide minor surface imperfections. It dries quickly to an eye soothing matt finish.

	K N K V	$\bigotimes$	Ø	ĊÐ		
low VOC & No odour	Excellent Opacity & Coverage	No Chalking	Excellent Hiding	Quick Drying		
Area of Ap	plication	Celing, Fals Concrete/B	0			
Method of	Application	Brush, Roller or Spray'				
Finish	Finish		Matt			
Drying tim	ie	45 mins				
Re-coatin	g Interval	5-6 hours				
Coverage	Coverage		160-170 sq.ft. per ltr 1 coat 110-120 sq.ft. per ltr 2 coat			
Dilution	Dilution		40-50% by volume with clean, potable water			
Pack Sizes	6	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr				
Shade		White & All bases are also avaialable				



## **PREMIUM INTERIOR & EXTERIOR EMULSION**

#### SPACE FLAT

4 IN 1



**SPACE FLAT** highly durable water based emulsion Matt finish Paint, offering resistance to chalking and cracking. It is provides protection against fungal and algal growth.

<u>S</u>			$\bigotimes$	
Long Lasting	Low VOC	Good	Anti Chalking	Fungal
Film		Coverage	Properties	Resist

Area of Application	Celing, False Ceiling & Plaster/Concrete/ Brick work, etc.
Method of Application	Brush, Roller or Spray'
Finish	Matt
Drying time	60 mins
Re-coating Interval	5-6 hours
Coverage	140-150 sq.ft. per Itr 1 coat 90-100 sq.ft. per Itr 2 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable



**4-IN-1 MULTI-PURPOSE EMULSION** is flat and durable paint which makes it ideal for both interior and exterior surfaces. Following extensive R&D and by listening to our decorating partners inputs, this dynamic paint has been developed for maximum performance which is based on acrylic modified emulsion.

4in1	Ø				(am)
4 IN 1	Smooth	Water	low VOC &	Excellent Stain	Washable
Property	Finish	Repellency	No odour	Resistance	

Area of Application	Celing, False Ceiling & Plaster/Concrete/ Brick work,etc.
Method of Application	Brush, Roller or Spray'
Finish	Matt
Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	190-200 sq.ft. per Itr 1 coat 110-120 sq.ft. per Itr 2 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr
Shade	White & All bases are also avaialable



## **PREMIUM INTERIOR & EXTERIOR EMULSION**

RUNNER

OCEAN



**RUNNER EMULSION** is a specially developed Superior product with a smooth finish with better whiteness, opacity and coverage compared to normal distemper. It is formulated by using ideal combination of pigments and extenders dispersed in a copolymer emulsion for smooth and pleasant matt finish.

			Ð	Ø	Ò		
Ultra Low VOC	Excellent Coverage	Excellent Opacity	Long Lasting	Excellent Hiding	Quick Drying		
Area of Application Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.					er/		
Method of	Application	Brush,	Brush, Roller or Spray'				
Finish		Matt	Matt				
Drying tim	ie	60 mir	าร				
Re-coating	g Interval	5-6 hc	ours				
Coverage		10 sq.ft. pe sq.ft. per					
Dilution	Dilution 30-40% by volume with clean, potable water			an,			
Pack Sizes	6	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr					
Shade		White	& All bases	s are also av	vaialable		



**OCEAN EMULSION** is formulated with specially modified silicon acrylic binder to give excellent whiteness and spatter resistance. Excellent hiding and smooth finish of this white ceiling paint helps to hide minor surface imperfections. It dries quickly to an eye soothing matt finish.

Low VOC & No odour	ドフレビン Excellent Coverage	Excellent Opacity	No Chalking	Excellent Hiding	Quick Drying		
Area of Application		•	Celing, False Ceiling & Plaster/ Concrete/Brick work,etc.				
Method of Application		Brush,	Roller or S	pray'			
Finish		Matt	Matt				
Drying time	e	60 mir	าร				
Re-coating	g Interval	5-6 hc	ours				
Coverage		120-140 sq.ft. per Itr 1 coat 70-80 sq.ft. per Itr 2 coat					
Dilution		30-40% by volume with clean, potable water					
Pack Sizes		20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr					
Shade		White	White & All bases are also avaialable				

BLESSING



**BLESSING** is a water based, matt finish paint which gives your walls a Smooth finish and rich beauty. Master Acrylic emulsion that makes the house look new for years to come.

Low VOC	Matt Finish	Better opacity in deep	Fungus Resistant	
Area of Application		Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.		
Method of Application		Brush, Roller or Spray'		
Finish		Matt		
Drying time		60 mins		
Re-coating In	terval	5-6 hours		
Coverage			ft. per Itr 1 coat . per Itr 2 coat	
Dilution		30-40% by volume with clean, potable water		
Pack Sizes		20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr		
Shade		White & All	bases are also avaialable	



## **INTERIOR & EXTERIOR PRIMER**

#### **ROCK DAMP BLOCK SEALER**

ROCK



**ROCK DAMP BLOCK SEALER** is a water-based wall sealer specially formulated to provide excellent adhesion and wall sealing. This product is suitable for both interior and exterior, masonry and gypsum surfaces. It bonds well with cement and plastered surfaces, thus enhancing the life of the top coat. It has superior anti-algal and anti-fungal properties.Speciality of this product it is water replient.

Low VOC	Anti-Algal	Water Replient	Anti Fungal	Anti- efflorescence
Area of A	pplication			iling & Plaster/ /Wood work,etc.
Method of Application		Brush	, Roller or	Spray'
Finish		Matt		
Drying time		60 mi	ns	
Re-coating Interval		5-6 h	ours	

Re-coating Interval	5-6 hours
Coverage	200-220 sq.ft. per ltr 1 coat
Dilution	40-50% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr



**ROCK EXTERIOR PRIMER** is water based concentrate of anti algal and anti fungal. Ims high adhesion and non- chalking properties. Gives superior hiding smoother top coat finish. No caring required.



Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick/Wood work, etc.
Method of Application	Brush, Roller or Spray
Finish	Matt
Drying time	60 mins
Re-coating Interval	4-5 hours
Coverage	180-190 sq.ft. per ltr 1 coat
Dilution	40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr

UNIVERSAL



**UNIVERSAL PRIMER** has been manufactured for above grade masonry surfaces where a high performance primer is needed. It is efflorescence and alkali resistant and will increase and reinforce the performance of the paints. It can be used on prosely prepared concrete, concrete block, brick and stucco. Universal Primer is also designed for use on exterior wood and plywood siding

Excellent Adhesion	Excellent Hiding		eveling	Quick Drying	<u>∎</u> द्रि Stain Suppression
Area of Ap	Area of Application		0		iling & Plaster/ Wood work, etc.
Method of	Method of Application		Brush, F	Roller or S	Spray
Finish	Finish		Matt		
Drying tim	Drying time		60 mins	6	
Re-coating	Re-coating Interval		4-5 hou	ırs	
Coverage	Coverage		210-220 sq.ft. per ltr 1 coat		
Dilution		40% by water	volume	with clean,potable	
Pack Sizes	5		20 Ltr, 1	0 Ltr, 4 L	tr, 1 Ltr



## **INTERIOR & EXTERIOR PRIMER**

#### CLASSIC

MASK



**CLASSIC PRIMER** is a specially formulated acrylic based primer for exterior cement, concrete & plaster surfaces.its unique formula provide extra protection to the top coat.it has exceelent hiding & spreading property.

			Pb	
Low VOC	Anti-Algal	Good Opacity	Lead Free	

Area of Application	Celing,False Ceiling & Plaster/ Concrete/Brick/Wood work,etc.
Method of Application	Brush, Roller or Spray'
Finish	Matt
Drying time	60 mins
Re-coating Interval	4-5 hours
Coverage	190-200 sq.ft. per Itr 1 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr



**MASK PRIMER** for better adhesion of the paint film to provide an additional layer of protection to the surface and increase the durability of the paint. On fully cured surfaces and for re-painting. We recommend the use of Paints Forever Mask Primer.

Ō				
Quick	No	Extra Topcoat	Excellent	
Drying	Chalking	Coverage	Adhesion	

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick/Wood work,etc.
Method of Application	Brush, Roller or Spray
Finish	Matt
Drying time	60 mins
Re-coating Interval	4-5 hours
Coverage	180-190 sq.ft. per ltr 1 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr

#### **BLESSING EXTERIOR**



**BLESSING EXTERIOR PRIMER** is water-based and is formulated to provide good adhesion to interior masonary and cement surfaces.it has good hiding properties and is easy to apply

Low-VOC	Good Adhesion	Good Opacity	Anti Fungal		
Area of Ap	Area of Application		Celing, False Ceiling & Plaster/ Concrete/Brick/Wood work, etc.		
Method of	Method of Application		Brush, Roller or Spray		
Finish	Finish				
Drying tim	ie	60 min	S		
Re-coatin	g Interval	4-5 ho	urs		
Coverage	Coverage		150-160 sq.ft. per ltr 1 coat		
Dilution		30-40% by volume with clean, potable water			
Pack Sizes		20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr			



## **INTERIOR & EXTERIOR PRIMER**

#### **BLESSING INTERIOR**

#### **CROWN WALL SEALER**

LAVA



BLESSING INTERIOR PRIMER is water based and is specially formulated for interior cement, concrete and plaster surfaces. it's unique formula provides extra protection to the top coat.

ß



**CROWN SEALER PROTECTIVE PRIMER** suitable for application on plaster, masonry, POP, putty or pre-painted surfaces. Specially formulated to give better adhesion the surface.



Anti Fungal Good Opacity

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick/Wood work,etc.
Method of Application	Brush, Roller or Spray'
Finish	Matt
Drying time	60 mins
Re-coating Interval	4-5 hours
Coverage	150-160 sq.ft. per ltr 1 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr



Good Opacity

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick/Wood work, etc.
Method of Application	Brush, Roller or Spray
Finish	Matt
Drying time	60 mins
Re-coating Interval	5-6 hours
Coverage	180-190 sq.ft. per Itr 1 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr



LAVA EXTERIOR & INTERIOR PRIMER is available in white color with best quality. It is widely used on building surfaces. Lava Exterior Cement Primer gives good leveling to the surfaces with long lasting.



Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick/Wood work,etc.
Method of Application	Brush, Roller or Spray
Finish	Matt
Drying time	60 mins
Re-coating Interval	4-5 hours
Coverage	180-190 sq.ft. per Itr 1 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr



## **ACRYLIC DISTEMPER/ ACRYLIC WALL PUTTY**

GRIP

PRIDE

sizes

FILLA




**GRIP ACRYLIC DISTEMPER** is a good quality distemper, which provides smooth matt finish for interior surfaces. It is suitable for all types of normal interior masonary surfaces.

ALEI	$(\mathcal{A})$	3.6	
Special Acrylic	Low Odour	Resist Scuffs	
Formulation	& Low Voc	& Stains	

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.
Method of Application	Brush, Roller or Spray
Finish	Matt
Drying time	60 mins
Re-coating Interva	5-6 hours
Coverage	90-110 sq.ft. per kg. 2 coat
Dilution	40-50% by volume with clean, potable water
Pack Sizes	20 Kg, 10 Kg, 5 Kg, 1 Kg



**PRIDE ACRYLIC DISTEMPER** is a water based distemper for all types of smooth interior masonary surafces. It is made available in an exhaustive shade range and provides a smooth & durable matt finish on the applied surfaces



20 Kg, 10 Kg, 5 Kg, 1 Kg



**FILLA ACRYLIC WALL PUTTY** is formulated for filling cracks, joints, leveling uneven and rough masonry and plasterwork up to 3-4mm. It is also used for filling defective cement surfaces to give a smooth and excellent finish.

Easy to Spread	Superior Whiteness	Excellent filling Property
Area of App	lication	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.
Method of A	pplication	Blade/Patti
Finish		Matt
Drying time		45 mins
Re-coating	Interval	5-6 hours
Coverage		20-25 sq.ft. per kg. 1 coat
Dilution		Not Required
sizes		20 Kg, 10 Kg, 5 Kg, 1 Kg



## **WOOD FILLER**

#### **WOOD FILLER**

## **METALLIC PAINT**

#### **METALLIC PAINT**

## **FLOOR PAINT**

#### **FLOOR PAINT**



**WOOD FILLER** is a substance used to fill imperfections, such as nail holes, in wood prior to finishing.

8		žÓ	e m		
Low Odour	Low	Resists Scuffs & Stains	Stains wash off easily superior scrubility	Super White	

- 0

Area of Application	Wood
Method of Application	Knife
Finish	Matt
Drying time	3-4 Hrs
Re-coating Interval	5-6 hours
Coverage	20-25 sq.ft. per kg. 1 coat
Dilution	Not Required
sizes	1 Kg



THIS REVOLUTIONARY WATER-BASED METALLIC Emulsion

gives a sparkling maetallic texture to your walls. Available in ready made ligh fast colours, this product can be applied on interior & exterior walls and roof tiles. Metallic Emulsion also keeps the wall alage & fungas free.

(× ×		♦.°↓ °↓°	$\sim$
Long Lasting	Low VOC	Excellent	High
Metalic Finish		Glitter	Sheen

AArea of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work,etc.
Method of Application	Brush, Roller, Spray
Finish	Glossy
Drying time	60 minutes
Re-coating Interval	5-6 hours
Coverage	130-140 sq.ft. per Itr 1 coat 90-100 sq.ft. per Itr 2 coat
Dilution	15 % by volume with clean, potable water
sizes	1 Ltr, 500 ML, 200 ML, 100 ML



**FLOOR PAINT** brings you a special paint to beautify your exterior floor tiles, and to protect your flooring from algal or fungal attack. It is suitable for application on terrae floor tiles, cement tiles affixed to driveways and walkways, or on any plain cement surface. The paint not only provides an aesthetic glossy finish, but is also resistant to abrasion from human and vehicular traffic.

Superior Adhesion Anti Algal	Soft Vibrant Colors
Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work,etc.
Method of Application	n Brush, Roller, Spray
Finish	Glossy
Drying time	30 Mins
Re-coating Interval	5-6 hours
Coverage	160-170 sq.ft. per Itr 1 coat 90-100 sq.ft. per Itr 2 coat
Dilution	30 % by volume with clean,potable water
sizes	4 Ltr, 1 Ltr



## **SOLVENT BASED PRODUCTS**

A premium solvent based multipurpose synthetic enamel & primers offering smooth high gloss finish. With benefits like excellent coverage , opacity along with fast drying and durability, makes it a superior SOLVENT BASED PRODUCT in its class.

**Hi Gloss Enamel** Extremely durable.Colour fade resistant,Scratch and stain resistant. Superb appearance with even gloss finish.

ORE\

Mask

hetic Primer Surfac

-

OREVER

Rock

TRAMIN MODULATION

Rock

ed Oxide Metal Primer -

NAME AND ADDRESS OF A DOCT

OREVE

HI-GLOSS

SYNTHETIC ENAMEL

PREMIUM QUALITY

PRIMER SURACER WHITE/grey/brown Excellent drying time, good performance, smooth & matt finish

RED OXIDE METAL PRIMER rust proof & high coverage

Area of Application	Celing,False Ceiling & Plaster/ Concrete/Brick/Wood/iron work, etc.
Method of Application	Brush, Roller or Spray
Finish	Gloss
Drying time	90-120 mins
Re-coating Interval	12-15 hours
Coverage	180-190 sq.ft. per Itr 1 Coat
Dilution	200-300 ml Per Ltr Oil Ratio
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr, 500 ml

FOREVER

Mask

d Duide Metal Promit





## WATERPROOFING

#### **ROCK 999 DURA SEAL**

#### **PAINTS FOREVER 502 URP**



ROCK DURA SEAL 999 binds with the surface giving water seepage resistance, it seals the surface against water & resist dampness, efflorescence, alkali



501 URP is based on modified latex supplied as a ready to use bonding agent in liquid consistency. It is used for repair of spalled concrete - floors, columns, beams, chhajas, slabs & waterproofing of toilets & bathrooms, small terraces etc. as it bonds strongly to old & new concrete and to plasters. It reduces shrinkage, prevents cracking, dust pick up & improves abrasion resistance.

PAINTS FOREVER 602 TOPPER 2K

**602 TOPPER 2K** is a acrylic cementitious, polymer modified elastomeric, waterproofing & protective coating composed of best quality Portland cement, properly selected & graded aggregates, additives & acrylic emulsion polymer as a binder. It is applied to waterproof and protect concrete and masonry substrates.

> Water

Resistant

Not Required

15 Kg, 3 Kg

Anti

cracking



**ROOF SEAL & COOL** 

ROOF SEAL & COOL is a water-based acrylic crosslinked elastomeric Cool roof coating. Its innovative advanced nanotechnology-based formulation offers high solar reflectivity and thermal emittance which significantly reduces the roof temperature where roofs get exposed to intense UV rays in the hottest weather. it works on the cool roof coating technology principle. Its high SRI value ensures that it reflects the maximum amount of heat. Its unique formulation holds well with the surface and offers complete protection with a promise to keep the building cool.

$\bigcirc$	<u>Ý</u>			<u>ښ</u> :	*
Waterproofing	UV Resistant	Wate Resista		Weatherproof	Solar Reflective
Area of App	lication		& F	of, Celing, Fal Plaster/Concr ork, etc.	0
Method of Application		Blade/Patti/Brush/Roller			
Finish		Matt			
Drying time		45 mins			
Re-coating Interval		5-6 hours			
Coverage		20-25 sq.ft. per ltr 1 coat		er Itr 1	
Dilution			Not Required		
sizes			20	ltr, 1 ltr	

$\widehat{\mathbb{O}}$		
Waterproofing	Efflorescence	Water

	Resistant	Resistant
Area of Applica	ation	Celing, False Ceiling & Plaster/Concrete/Brick work, etc.
Method of App	lication	Patti
Finish		Matt
Drying time		8 Hours
Re-coating Int	erval	7-8 hours
Coverage		8-10 sq.ft. per Kg 1 coat
Dilution		5 % for 2 <sup>nd</sup> Coat
Sizes		20kg, 10kg, 5kg, 1 kg

Efflorescence	Water	Anti
Resistant	Resistant	cracking

Waterproofing

istant	Resistant	cra

Area of Application	Celing, False Ceiling & Plaster/Concrete/Brick work, etc.
Method of Application	Brush
Finish	Matt
Drying time	6 Hours
Re-coating Interval	8 HOURS
Coverage	22-25 sq.ft. per Ltr 1 coat
Dilution	Required
Sizes	1 ltr, 5 ltr, 20 ltr

$\bigcirc$	
Waterproofing	Efflorescence Resistant

Area of Application	Celing, False Ceiling & Plaster/Concrete/Brick work, etc.
Method of Application	Brush
Finish	Matt
Drying time	45 mins
Re-coating Interval	5-6 hours
Coverage	20-25 sq.ft. per ltr 1 coat

Dilution

sizes

27



## **TILE ADHESIVE**

#### **RED BULL**



**RED BULL** Cement Tile Adhesive is a single component, pre-packed tiling adhesive mortar, combining cement with selected grades of sands and several admixtures. It is premixed used for stones to fix on walls

#### Paintable

- · Yields consistent product quality
- Good workability
- Long pot life



**BLACK PANTHER** 

**BLACK PANTHER** is a wonderful mixture of cement, silica and different polymers for installation of creamic,vitrified tiles, stones, quarry tiles, pavers and bricks on facades. It is flexible to handle structural movement and can take an extreme weather weather conditions.

- High Bond Strength
- No shrinkage
- Zero Wastage
- Best Mechanical Strength

#### FOREVER



**PAINTS FOREVER** Tile Adhesive is a ready mixed polymer modified cement based powder which is multi purpose tile adhesive. It provides outstanding bonding of tiles with cementitious surfaces like plaster, concrete etc. Tile Adhesive is non shrinking, self curing and has brilliant binder properties.

- Non Shrinking
- Self Curing
- Best bonding
- Best Mechanical Strength

#### **EPOXY GROUT**



PAINTS FOREVER EPOXY GROUT is a stain-free two component based tile grout which is specifically designed for applications on dry and wet areas where staining is expected, such as kitchens, swimming pools, commercial spaces, cafeterias etc. It is applicable on interior and exterior\* floors and walls of all types of tiles such as ceramic, vitreous, semi-vitreous, glass mosaic tiles, stones etc.

- Permanent locking of colours between joint
- High quality UV stable colour quartz in 23 shade
- No stain on grout joints
- High chemical & stain resistant
- Almost waterproof by its nature
- Smooth and shiny flush joints between tiles & stone

Area of Application	concrete, cement plaster, cement tiles and stone bricks masonary, gypsum wall board	Area of Application	Concrete, cement plaster, cement tiles and stone bricks masonary, gypsum wall board	Area of Application	Concrete, cement plaster, cement tiles and stone bricks masonary, gypsum wall board	Area of Applicati
Application	Both for interior and exterior facades	Application	Both for interior and exterior facades	Application	Both for interior and exterior facades	Application
Coverage	appr. 45-50 sq. ft. 20 kg bag at 3 mm thickness	coverage	appr. 45-50 sq. ft. 20 kg bag at 3 mm thickness	coverage	appr. 45-50 sq. ft. 20 kg bag at 3 mm thickness	coverage
Dilution	40 % by volume with clean,	Dilution	40 % by volume with clean,	Dilution	40 % by volume with clean,	Width of joint
	potable water		potable water		potable water	Sizes
Colour	white & grey	Colour	white & grey	colour	White & Grey	
Sizes	20 kg	Sizes	20 kg	sizes	20 kg	

rea of Application	Used for filling the joints of up to 12mm between ceramic tiles, vitrified tiles and stones.
pplication	Both for interior and exterior
overage	appr. It is based on tile size, joint width & depth
/idth of joint	upto 15 mm
izes	1 kg & 5 kg



## **TEXTURE & WALLPUTTY**

#### TEXTURE



**FOREVER TEXTURE** Finish is made with high quality marble powder, silica sand and quartz in a rich acrylic binding medium. This paint gives a very unique and different feel making the walls stand out. This material has excellent binding to the surface and has the ability to hide small cracks.

- Rustic, Perlina, Superfine
- Long Duarbility
- Resistant to sunlight & rainfall
- Ready mix paste for direct application
- Easy Appliocation
- Water Resistance

Area of Application	False Ceiling & Plaster/Concrete/ Brick work, etc.
Method of Application	Putty knife
Finish	Matt
Drying time	12-16 hours
Coverage	4-5 sq. ft. 2 coat
Dilution	Not recommended
sizes	25 kg

#### FOREVER WALLPUTTY



**PAINTS FOREVER** White Cement Based Wall Putty is a specially formulated product based on white cement blended with special fillers and additives tobe used as putty, filler & sealer, on concrete/ mortat walls and ceiling for both interior & exteriors. It renders to the surface, smooth bright while coating suitable for over coating by different kinds of water and solvent based paints, of attractive colors, giving a durable and smooth finish on the walls. It also contains fungicides, preventing fungus. The other feature of the product is that though it is based on cement, but unlike cement paint, it does not requie any water for curing.

- Long Duarbility
- Resistant to sunlight & rainfall
- Resist Flaking
- Eco Friendly

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.
Method of Application	Putty knife
Finish	Matt
Drying time	4-6 hours
Coverage	12-15 sq. ft. 2 coat
Dilution	1st coat 45% prtable water
Sizes	20 kg, 40 Kg

#### WATERPROOF WALLPUTTY



**SAFE WALL, ROCK DAMP PROOF** wallputty is a specially designed white cement based premium quality putty with unique properties and silicone additives. It can be used on interior as well as exterior concrete/mortar surfaces to provide a smooth aesthetic finish as well as an extended life of top coats.

- Superior Water Resistance
- Anti-Efflorescent Properties
- Vibrant White Finish
- Water repellency

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.
Method of Application	Putty knife
Finish	Matt
Drying time	4-6 hours
Coverage	15-16 sq. ft. 2 coat
Dilution	1st coat 45% prtable water
sizes	20 kg



#### LUXURY INTERIOR & EXTERIOR EMULSION LEGEND SHEEN



#### LEGEND SHEEN LUXURY INTERIOR & EXTERIOR EMULSION

is an Acrylic based emulsion and is a 'Gold Standard' emulsion. It has a smooth sheen finish that ensures long lasting beautiful walls. It is highly durable and washable. It is anti peel, anti fungal and resists fading and offers good hiding.

High Durability	Gold Standard Emulsion	Smooth Sheen	Non Fading Bright Colours	Advance Fungal Protection	Peel Guard	
Area of A	Application		eling, False Ce oncrete/Brick	eiling & Plaster work, etc.	/	
Method	of Applicatior	n Br	Brush, Roller or Spray'			
Finish		Sh	Sheen			
Drying time			45 mins			
Re-coating Interval			6 hours			
Coverage			170-190 sq.ft. per Itr 1 coat 110-120 sq.ft. per Itr 2 coat			
Dilution			30-40% by volume with clean, potable water			
Pack Siz	es	20	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr			
Shade		Wh	White & All bases are also avaialable			

#### SUPER PREMIUM INTERIOR & EXTERIOR EMULSION GRAND SHINE



**GRAND SHINE EMULSION** gives the best-in-class coverage, whiteness, smoothness & finish to the walls. Its enhanced bioresistant formula prevents the walls from fungal & algal attacks and the fine extenders helps in giving a butter-like smooth finish to the walls.

Long Lasting Low VOC Pearl Like Finish	Best in Class Smooth Water repellance Finish		
Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.		
Method of Application	Brush, Roller or Spray'		
Finish	Sheen		
Drying time	45 mins		
Re-coating Interval	5-6 hours		
Coverage	170-190 sq.ft. per Itr 1 coat 120-130 sq.ft. per Itr 2 coat		
Dilution	30-40% by volume with clean, potable water		
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr		
Shade	White & All bases are also avaialable		



#### **EXCELLENT RANGE INTERIOR** & EXTERIOR EMULSION

**GRAND WAVE** 



**GRAND WAVE EMULSION** is a specially developed Superior product with a smooth finish with better whiteness, opacity and coverage compared to normal distemper. It is formulated by using ideal combination of pigments and extenders dispersed in a copolymer emulsion for smooth and pleasant matt finish.

Ultra Low VOC	Excellent Opacity & Coverage	Long Lasting Excellent Hiding Ouick Drying			
Area of Application		Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.			
Method o	of Application	Brush, Roller or Spray'			
Finish		Matt			
Drying time		60 mins			
Re-coati	ng Interval	5-6 hours			
Coverage		120-140 sq.ft. per Itr 1 coat 70-80 sq.ft. per Itr 2 coat			
Dilution		30-40% by volume with clean, potable water			
Pack Size	es	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr			
Shade		White & All bases are also avaialable			

#### **EXTERIOR EMULSION**

#### **GRAND EXTERIOR**



**GRAND EXTERIOR EMULSION** is a high quality, water based smooth emulsion paint which provides high sheen to your walls. Its Chroma Brite Glow-UV Fight Technology keeps the exterior wall colour brighter for longer. It is equipped with good coverage and good opacity formulation which gives a good finish to the walls and its unique Anti Peeling properties ensures that the paint film remains intact under the exterior weather conditions.

Ultra Low VOC	Excellent Opacity & Coverage	Excellent Hiding		
Area of Application		Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.		
Method of	of Application	Brush, Roller or Spray'		
Finish		Matt		
Drying time		60 mins		
Re-coati	ng Interval	5-6 hours		
Coverage		120-130 sq.ft. per Itr 1 coat 70-80 sq.ft. per Itr 2 coat		
Dilution		30-40% by volume with clean, potable water		
Pack Size	es	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr		
Shade		White & All bases are also avaialable		

#### **INTERIOR EMULSION**

#### **GRAND INTERIOR**



**GRAND INTERIOR EMULSION** is a high quality, water based acrylic emulsion paint which provides aesthetic look to your walls. Its Chroma Brite Technology keeps the interior wall colour brighter for longer. It is equipped with good coverage and good opacity formula which gives a rich finish to walls and its unique Anti Chalking properties prevents the paint film from chalking giving a fresh & bright look to your walls.

Ultra Low VOC	Excellent Opacity & Coverage	Superior whiteness	Quick Drying		
Area of App	olication	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.			
Method of	Application	Brush, Roller or Spray'			
Finish	Finish		Matt		
Drying time		60 mins			
Re-coating	Re-coating Interval				
Coverage		120-140 sq.ft. 70-80 sq.ft. p	•		
Dilution		30-40% by volume with clean, potable water			
Pack Sizes	Pack Sizes		4 Ltr, 1 Ltr		
Shade		White & All bases are also avaialable			



#### **EXTERIOR PRIMER**

#### **GRAND DAMP GUARD SEALER**



**GRAND DAMP GUARD SEALER** is a water-based wall sealer specially formulated to provide excellent adhesion and wall sealing. This product is suitable for both interior and exterior, masonry and gypsum surfaces. It bonds well with cement and plastered surfaces, thus enhancing the life of the top coat. It has superior anti-algal and anti-fungal properties.Speciality of this product it is water replient

			-		
Low VOC	Anti-Algal	Water Repllent	Anti Fungal	Anti- efflorescence	
Area of Ap	plication		Celing,False Ceiling & Plaster/ Concrete/Brick/Wood work, etc.		
Method of Application		Brush	Brush, Roller or Spray'		
Finish		Matt			
Drying time		60 m	ins		
Re-coatin	g Interval	5-6 h	5-6 hours		
Coverage		200-2	200-220 sq.ft. per ltr 1 coat		
Dilution			40-50% by volume with clean, potable water		
Pack Sizes		20 Lt	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr		

#### **INTERIOR PRIMER**

GRAND



**GRAND INTERIOR PRIMER** is water-based and is formulated to provide good adhesion to interior masonary and cement surfaces.it has good hiding properties and is easy to apply

#### Low VOC Good Good Anti Adhesion Opacity Fungal

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick/Wood work, etc.
Method of Application	Brush, Roller or Spray
Finish	Matt
Drying time	60 mins
Re-coating Interval	4-5 hours
Coverage	150-160 sq.ft. per ltr 1 coat
Dilution	30-40% by volume with clean, potable water
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr

#### INTERIOR & EXTERIOR PRIMER GRAND

E



**GRAND EXTERIOR PRIMER** is water based and is specially formulated for interior cement, concrete and plaster surfaces. it's unique formula provides extra protection to the top coat.

	- And		
Low VOC	Anti Fungal	Good Opacity	

AArea of Application	Celing,False Ceiling & Plaster/ Concrete/Brick/Wood work,etc.		
Method of Application	Brush, Roller or Spray'		
Finish	Matt		
Drying time	60 mins		
Re-coating Interval	4-5 hours		
Coverage	150-160 sq.ft. per Itr 1 coat		
Dilution	30-40% by volume with clean, potable water		
Pack Sizes	20 Ltr, 10 Ltr, 4 Ltr, 1 Ltr		



#### **ACRYLIC DISTEMPER**

#### GRAND



**GRAND ACRYLIC DISTEMPER** is a water based distemper for all types of smooth interior masonary surafces. It is made available in an exhaustive shade range and provides a smooth & durable matt finish on the applied surfaces

Special Acrylic	Low Odour &	Resist Scuffs	Superior	
Formulation	Low Voc	& Stains	color Delivery	
Area of App	lication		alse Ceiling & /Brick work, e	

Method of Application	Brush, Roller or Spray'
Finish	Matt
Drying time	60 mins
Coverage	90-110 sq.ft. per ltr 2 coat
Dilution	40-50% by volume with clean, potable water
Sizes	40 Kg, 30 Kg, 20 Kg

#### WALL PUTTY

GRAND



**GRAND WALL PUTTY** is a white cement-based powder finished coating applied on walls, surfaces, and ceilings. This covers unevenness, undulations and pinholes on the plastered surface. It strengthens the wall and protects expensive paints from dampness, efflorescence, and moisture. Grand Wall Putty is modified with polymers and special additives for enhanced strength, finish, and performance.

Long Duarbility	Resistant to sunlight & rainfall	Resist Flaking	Eco Friendly		
Area of Application		Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.			
Method of Application		Putty kr	nife		
Finish		Matt	Matt		
Drying time		4-6 hours			
Coverage		12-15 sq. ft. 2 coat			
Dilution		1st coat	45% prtable water		

20 kg, 40 Kg

Sizes

#### WATERPROOFING

#### **GRAND WALL SEAL 555**



**RAND WALL SEAL 555** binds with the surface giving water seepage resistance, it seals the surface against water & resist dampness, efflorescence, alkali

(		$\sim$
Waterproofing	Efflorescence Resistant	Water Resistant

Area of Application	Celing, False Ceiling & Plaster/ Concrete/Brick work, etc.
Method of Application	Patti
Finish	Matt
Drying time	8 Hours
Coverage	8-10 sq.ft. per Kg 1 coat
Dilution	5 % for 2nd Coat
Sizes	20kg, 10kg, 5kg, 1 kg



## **MAJESTIC GRAND HOTEL**

## **MAJESTIC RESORT**












## **SHERIDAN INN**

## **HOTEL MARITON JALANDHAR**

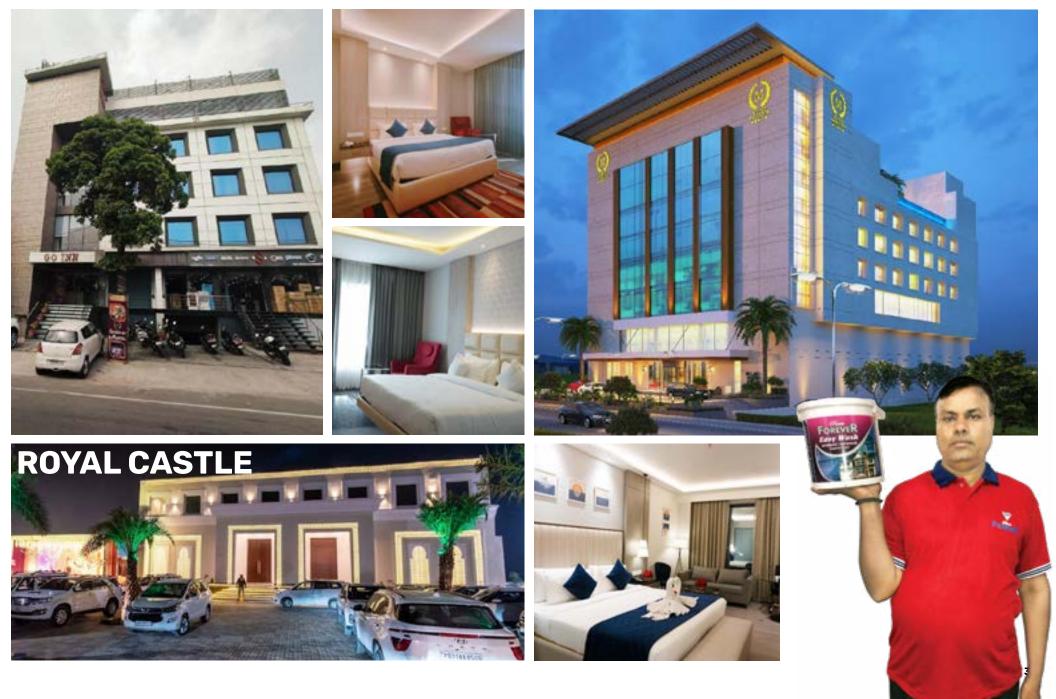





Scan this OR to

Paint Forever website

#### Manufatured by: F. C. International

Corp. Off: Plot No. 11/11 A, Wariana-144021 Email: info@paintsforever.net

#### Folow us on social media



## For more information Visit www.paintsforever.net

For feedback or complaint, write to Marketing Manager, at Paint Forever, Plot No. 11/11 A, Wariana-144021 or Call on +91 99886-61704 and email us at info@paintsforever.net

#### **Disclaimer:**

The shades shown in shis book are indicative only. Please refer to Paint Forever colour Palette for exact shade referece.

All rights reserved. copyright PAINT FOREVER